


PP RIBWALL PUSH COUPLING

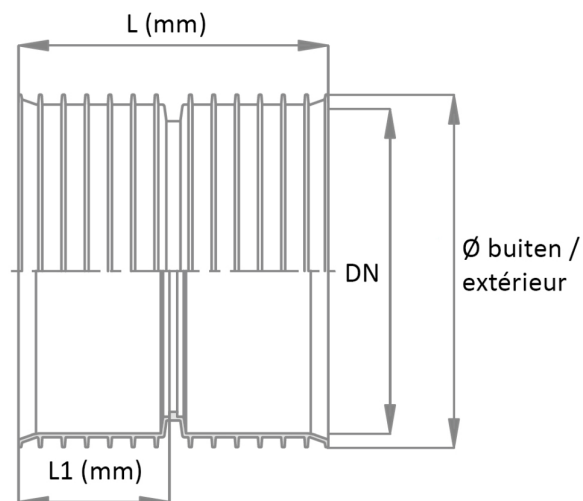

Characteristics

Characteristic	Value	Characteristic	Value
Raw material	PP	Colour	Reddish brown
Pipe wall	Ribbed	Certificate	BENOR
Connection	Push-in socket	Certificate norm	EN 13476-3

Variants

Article code	Commercial Code	DN	outer_diameter	Length (mm)	Ring stiffness
14917	PPRIBM400	400	499	427	SN8
14916	PPRIBM300	300	376	315	SN8
27991	PPRIBM160	150	192	167	SN8
14915	PPRIBM250	250	317	270	SN8
14919	PPRIBM600	600	731	618	SN8
14914	PPRIBM200	200	254	220	SN8
14918	PPRIBM500	500	615	536	SN8
14920	PPRIBM800	800	970	794	SN8
14921	PPRIBM100	1000	1212	972	SN8

