


VITRIFIED CLAY 45° T-JOINT NORMAL LOAD

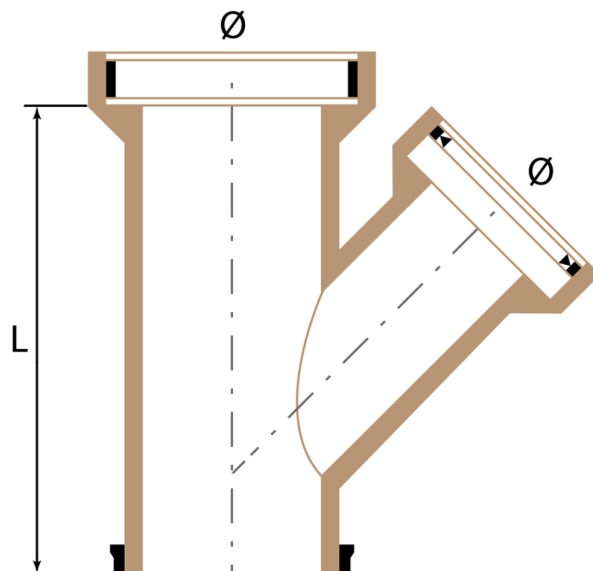

Description

Stoneware T-joint (clay), manufactured from glazed high-quality fired clay, supplied with sealing.

Advantages

- Durable and environmentally friendly natural product
- Impact-resistant
- High chemical resistance
- Smooth surface prevents build-up and deposits inside the pipe

Characteristics

Characteristic	Value	Characteristic	Value
Raw material	GRES	Colour	Brown
Connection	Double socket/spigot	Certificate	BENOR
Pipe wall	Solid wall	Certificate norm	EN 295-1

Variants

Article code	Commercial Code	Diameter Ø (mm)	Diameter Ø 2 (mm)	Degrees (°)	Joint	System	Weight (kg)
15667	GREST12124	125	125	45	LL	FF	15
15668	GREST15154	150	150	45	LL	FF	20
15670	GREST20204	200	200	45	LL	FF	40

