


VITRIFIED CLAY 90° REDUCER T-JOINT NORMAL LOAD

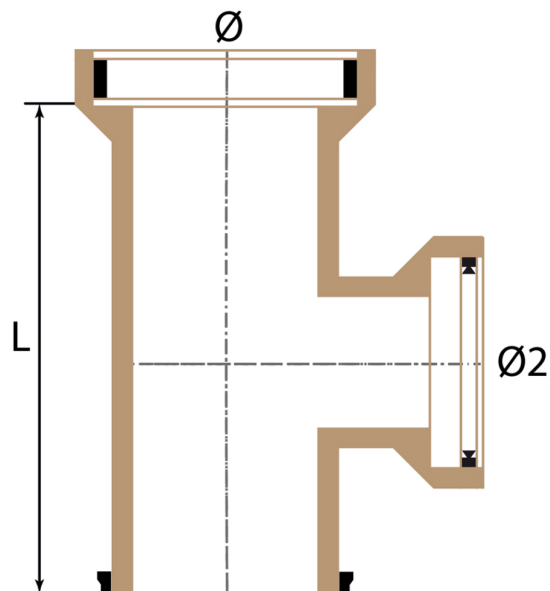

Description

Stoneware T-joint (clay), manufactured from glazed high-quality fired clay, supplied with sealing.

Advantages

- Durable and environmentally friendly natural product
- Impact-resistant
- High chemical resistance
- Smooth surface prevents build-up and deposits inside the pipe

Characteristics

Characteristic	Value	Characteristic	Value
Raw material	GRES	Colour	Brown
Connection	Double socket/spigot	Certificate	BENOR
Pipe wall	Solid wall	Certificate norm	EN 295-1



VITRIFIED CLAY 90° REDUCER T-JOINT NORMAL LOAD**Variants**

Article code	Commercial Code	Diameter Ø (mm)	Diameter Ø 2 (mm)	Degrees (°)	Joint	System	Weight (kg)
21256	GRESRT20159	200	150	90	KL	CF	32
15803	GRESRT25159	250	150	90	KL	CF	41
21616	GRESRT25209	250	200	90	KL	CF	48
17559	GRESRT25129	250	125	90	KL	CF	41
16069	GRESRT30209	300	200	90	KL	CF	60
16068	GRESRT30159	300	150	90	KL	CF	49
19904	GRESRT4015	400	150	90	KL	CF	87
19907	GRESRT5015	500	150	90	KL	CF	0

