


VITRIFIED CLAY 45° REDUCER T-JOINT HIGH LOAD

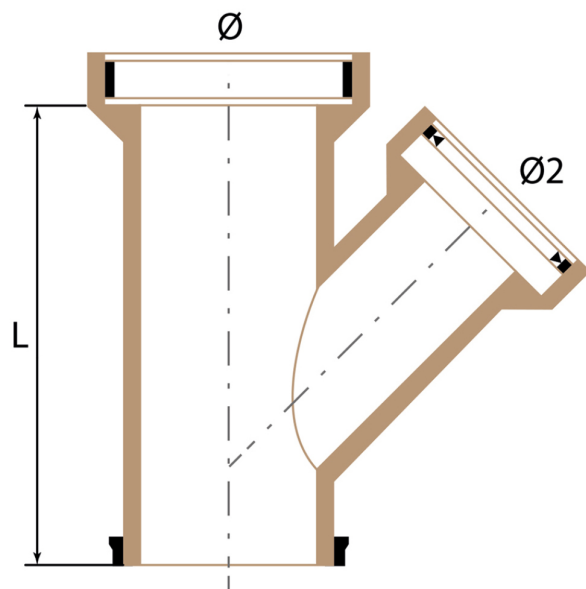

Description

Stoneware T-joint (clay), manufactured from glazed high-quality fired clay, supplied with sealing.

Advantages

- Durable and environmentally friendly natural product
- Impact-resistant
- High chemical resistance
- Smooth surface prevents build-up and deposits inside the pipe

Characteristics

Characteristic	Value	Characteristic	Value
Raw material	GRES	Colour	Brown
Connection	Double socket/spigot	Certificate	BENOR
Pipe wall	Solid wall	Certificate norm	EN 295-1

Variants

Article code	Commercial Code	Diameter Ø (mm)	Diameter Ø 2 (mm)	Degrees (°)	Joint	System	Weight (kg)
21547	GRESRT20154H	200	150	45	KL	CF	36
16088	GRESRT25204HN	250	200	45	KL	CF	64
16087	GRESRT25154H	250	150	45	KL	CF	55
16090	GRESRT30154H	300	150	45	KL	CF	73

