


VITRIFIED CLAY 90° REDUCER T-JOINT HIGH LOAD

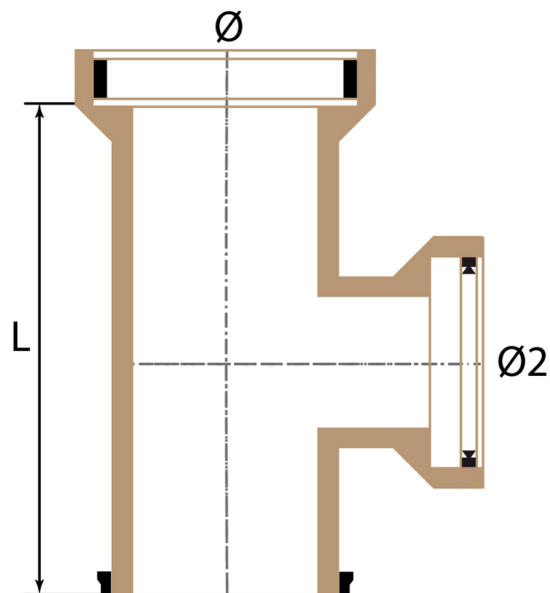

Description

Stoneware T-joint (clay), manufactured from glazed high-quality fired clay, supplied with sealing.

Advantages

- Durable and environmentally friendly natural product
- Impact-resistant
- High chemical resistance
- Smooth surface prevents build-up and deposits inside the pipe

Characteristics

Characteristic	Value	Characteristic	Value
Raw material	GRES	Colour	Brown
Connection	Double socket/spigot	Certificate	BENOR
Pipe wall	Solid wall	Certificate norm	EN 295-1

Variants

Article code	Commercial Code	Diameter Ø (mm)	Diameter Ø 2 (mm)	Degrees (°)	Joint	System	Weight (kg)
16089	GRESRT25159H	250	150	90	KL	CF	55
17299	GRESRT30159H	300	150	90	KL	CF	73
19908	GRESRT4015H	400	150	90	KL	CF	129

