


CAST IRON DOUBLE-TOOTH COVER A15

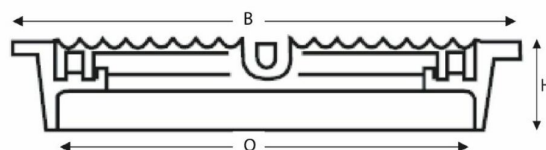

Description

Cover with a double tongue-and-groove profile, greased to ensure hydraulic watertightness.

- Perfect fit on PVC and PP inspection chambers (not on the collar).
- Provided with a bituminous coating to prevent corrosion.
- A prefabricated concrete seating ring can also be used to provide the necessary support for the cover.
- Suitable for pedestrian traffic only.
- Frame supplied as standard with DRWA marking.

Characteristics

Characteristic	Value	Characteristic	Value
Raw material	Cast iron	Load class	A15
Shape	Round / Square	Certificate	Uncertified
Lid properties	Hydraulic seal		

Variants

Article code	Commercial Code	Width (mm)	Length (mm)	Clear opening diameter Ø (mm)	Height (mm)
1751	STZ250D	300	300	250	78
1753	STZ315D	395	395	315	85
1755	STZ400D	500	500	400	93

