


VITRIFIED CLAY 45° REDUCER T-JOINT NORMAL LOAD

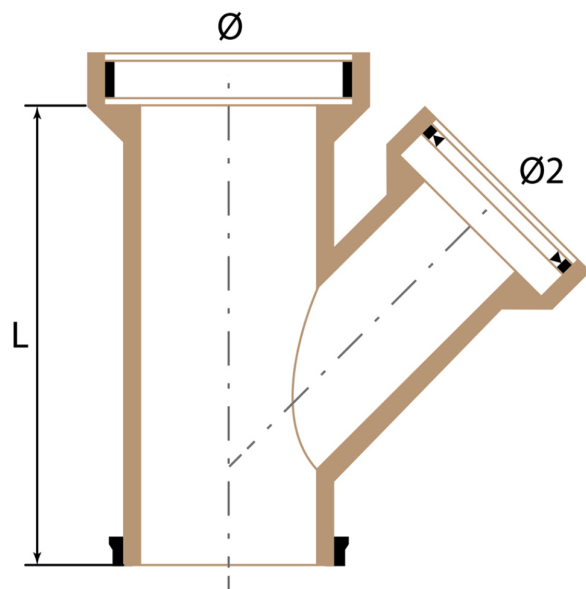

Description

Stoneware T-joint (clay), manufactured from glazed high-quality fired clay, supplied with sealing.

Advantages

- Durable and environmentally friendly natural product
- Impact-resistant
- High chemical resistance
- Smooth surface prevents build-up and deposits inside the pipe

Characteristics

Characteristic	Value	Characteristic	Value
Raw material	GRES	Colour	Brown
Connection	Double socket/spigot	Certificate	BENOR
Pipe wall	Solid wall	Certificate norm	EN 295-1



VITRIFIED CLAY 45° REDUCER T-JOINT NORMAL LOAD

Variants

Article code	Commercial Code	Diameter Ø (mm)	Diameter Ø 2 (mm)	Degrees (°)	Joint	System	Weight (kg)
16720	GRESRT20154	200	150	45	KL	CF	32
17558	GRESRT25124	250	125	45	KL	CF	
16067	GRESRT25204	250	200	45	KL	CF	48
16008	GRESRT25154	250	150	45	KL	CF	41
16062	GRESRT30154	300	150	45	KL	CF	49

