
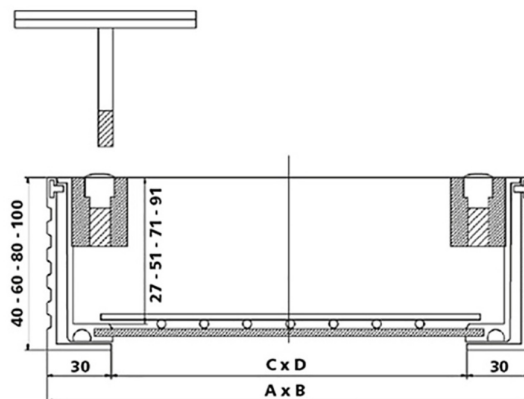


L&S LIGHT LINE TILE AND CLINKER LID ALUMINIUM

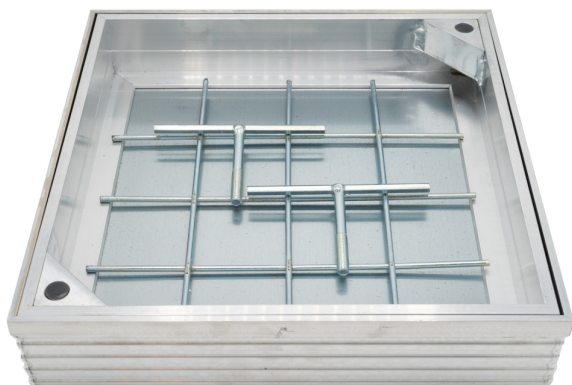

Description

Tile and paving lid made of extruded aluminium.

- The lid is freely seated in the frame.
- Equipped with a reinforcement mesh.
- 3 mm galvanised steel plate as base plate.
- Two seals: one on the bottom and one on the side of the outer frame.
- T-shaped rubber with triple function: prevents the ingress of dirt, provides a spring effect to reduce stress between the infill cover and the frame, and ensures additional odour sealing.

Advantages

Easy to open using lifting keys.

Characteristics

Characteristic	Value	Characteristic	Value
Raw material	Aluminium	Load class	A15
Lid properties	Clinker lid / Tile cover		



L&S LIGHT LINE TILE AND CLINKER LID ALUMINIUM

Variants

Article code	Commercial Code	Width (mm)	Length (mm)	Opening width (mm)	Opening length (mm)	Height (mm)	Weight (kg)
21988	LS40LIGHT030	300	300	240	240	40	3,56
17739	LS60LIGHT030	300	300	240	240	60	3,86
17548	LS80LIGHT030	300	300	240	240	80	4,94
41265	LS100LIGHT030	300	300	240	240	100	4,94
21989	LS40LIGHT040	400	400	340	340	40	5,73
17740	LS60LIGHT040	400	400	340	340	60	6,08
17549	LS80LIGHT040	400	400	340	340	80	6,80
41266	LS100LIGHT040	400	400	340	340	100	7,43
21990	LS40LIGHT050	500	500	440	440	40	8,56
17741	LS60LIGHT050	500	500	440	440	60	8,94
17550	LS80LIGHT050	500	500	440	440	80	10,09
41267	LS100LIGHT050	500	500	440	440	100	10,83
21991	LS40LIGHT060	600	600	540	540	40	11,96
17742	LS60LIGHT060	600	600	540	540	60	12,25
17551	LS80LIGHT060	600	600	540	540	80	13,52
41268	LS100LIGHT060	600	600	540	540	100	14,41
21992	LS40LIGHT070	700	700	640	640	40	15,61
17743	LS60LIGHT070	700	700	640	640	60	15,96
17552	LS80LIGHT070	700	700	640	640	80	17,36
41269	LS100LIGHT070	700	700	640	640	100	18,39
23384	LS40LIGHT080	800	800	740	740	40	19,93
17744	LS60LIGHT080	800	800	740	740	60	20,33
17553	LS80LIGHT080	800	800	740	740	80	21,86
41270	LS100LIGHT080	800	800	740	740	100	23,04
23385	LS40LIGHT090	900	900	840	840	40	24,73
17745	LS60LIGHT090	900	900	840	840	60	25,11
17554	LS80LIGHT090	900	900	840	840	80	26,76
12955	LS100LIGHT090	900	900	840	840	100	28,09
23386	LS40LIGHT100	1000	1000	940	940	40	30,38
17746	LS60LIGHT100	1000	1000	940	940	60	30,73
17555	LS80LIGHT100	1000	1000	940	940	80	32,52
12956	LS100LIGHT100	1000	1000	940	940	100	33,99

