


Wrapped PP infiltration crate

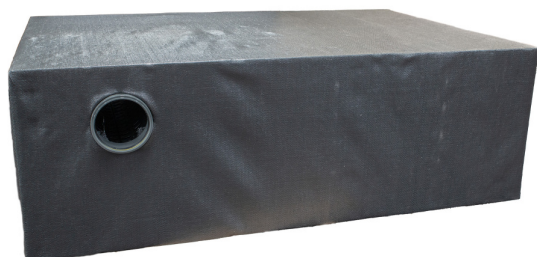

Description

Infiltration crate supplied as a pre-packed, ready-to-install package.

- Wrapped in high-quality woven geotextile, type SG29/29, BENOR-certified.
- Pedestrian load from 15 cm cover; passenger vehicles from 50 cm cover.
- Maximum cover depth: 240 cm.

Advantages

- Three-dimensional water-permeable structure
- BENOR-certified geotextile with no risk of clogging
- Equipped with pre-assembled inlet and outlet Ø160 mm and inspection channel
- Storage capacity: 95%
- Permeability coefficient: > 63%

Application

The pre-packed infiltration crate is specifically designed for compact applications. The system forms part of a sustainable water management solution and is intended for the storage, conveyance and infiltration of rainwater, whether originating from roofs, car parks, terraces, driveways or any other paved surface.



Wrapped PP infiltration crate

Characteristics

Characteristic	Value	Characteristic	Value
Raw material	PP	Connection diameter (mm)	160
Colour	Black	Inspectable	Yes

Variants

Article code	Commercial Code	Gross volume (L)	Net volume (L)	Width (mm)	Length (mm)	Height (mm)	Side infiltration area (m²)
19130	VARIOIK216L60	216	205	600	600	600	1,44
19131	VARIOIK432L120	432	410	600	1200	600	2,16
19133	VARIOIK864L240	864	820	600	2400	600	3,60
19132	VARIOIK648L180	648	615	600	1800	600	2,88
19216	VARIOIK864L120	864	820	1200	1200	600	2,88
19134	VARIOIK1296L180	1296	1230	1200	1800	600	3,60

