


SOCKETED GRP PIPE SN5000

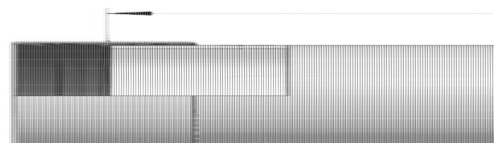

Description

Centrifugally cast Hobas pipes are designed for exceptional resistance to acids. They are most commonly used for sewerage, drainage and rainwater applications. Water jet resistant in accordance with DIN 19523.

Characteristics

Characteristic	Value	Characteristic	Value
Raw material	Polyurethane reinforced with fibreglass	Colour	Beige
Connection	Socketed	Certificate	BENOR

Variants

Article code	Commercial Code	Diameter Ø (mm)	Length (m)	Wall thickness (mm)	Ring stiffness
21173	GVKG1212SN5	1200	6	22	SN5000

