


SOCKETED GRP PIPE SN10000

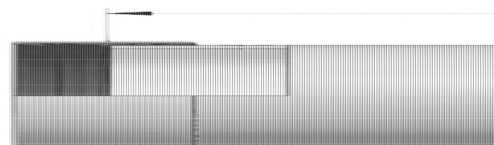

Description

Centrifugally cast Hobas pipes are designed for exceptional resistance to acids. They are most commonly used for sewerage, drainage and rainwater applications. Water jet resistant in accordance with DIN 19523.

Characteristics

Characteristic	Value	Characteristic	Value
Raw material	Polyurethane reinforced with fibreglass	Colour	Beige
Connection	Socketed	Certificate	BENOR

Variants

Article code	Commercial Code	Diameter Ø (mm)	Length (m)	Wall thickness (mm)	Ring stiffness
21359	GVKG3032SN10	300	6	9	SN10000
21179	GVKG4042SN10	400	6	11	SN10000
21182	GVKG5053SN10	500	6	12	SN10000
21184	GVKG6061SN10	600	6	14	SN10000
21186	GVKG7071SN10	700	6	17	SN10000
21188	GVKG8082SN10	800	6	19	SN10000
21190	GVKG9092SN10	900	6	21	SN10000
21192	GVKG1010SN10	1000	6	23	SN10000
21194	GVKG1212SN10	1200	6	27	SN10000
21197	GVKG1414SN10	1400	6	32	SN10000

