


GEOTEXTILE WOVEN SG60/60 5.25X100M BENOR 240G/M²



Characteristics

Characteristic	Value	Norm
Article code	21532	
Commercial Code	GE06060	
Raw material	Polypropyleen	
Weight (g/m ²)	240	EN ISO 9864
Width (m)	5,25	
Length (m)	100	
Tensile strength MD (kN/m)	60	EN ISO 10319
Tensile strength CD (kN/m)	60	EN ISO 10319
Elongation at max. load MD (%)	13	EN ISO 10319
Elongation at max. load CD (%)	13	EN ISO 10319
Tension at 2% elongation at break MD (kN/m)	6	EN ISO 10319
Tension at 2% elongation at break CD (kN/m)	6	EN ISO 10319
Tension at 5% elongation at break MD (kN/m)	13.5	EN ISO 10319
Tension at 5% elongation at break CD (kN/m)	13.5	EN ISO 10319
Static perforation resistance CBR (N)	5600	EN ISO 12236
Sand permeability O90 (µm)	280	EN ISO 12956
Water vapour permeability (l/m ² *sec)	23	EN ISO 11058
Resistance to dynamic perforation (mm)	9	EN ISO 13433
Thickness at 2 kPa (mm)	1,20	EN ISO 9863-1
Certificate	BENOR	

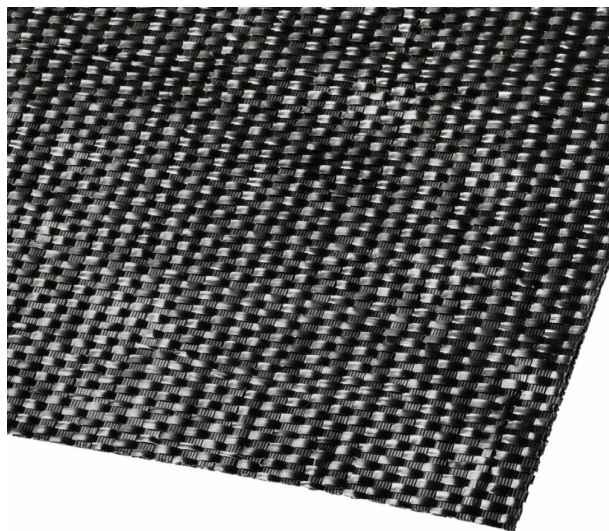