


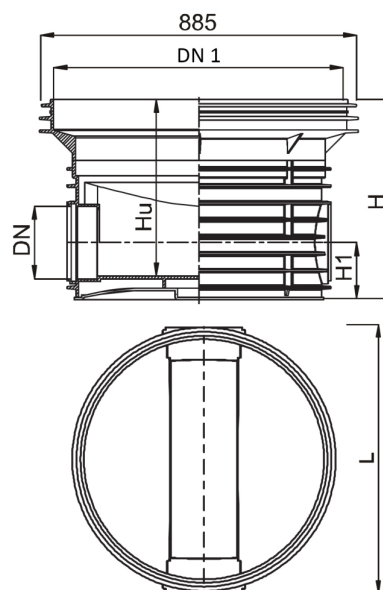

### Description

Profiled manhole base composed of an injection-moulded manhole body, equipped with reinforcing ribs, steps and a flow profile adapted to the outlet diameter. Suitable for connection to standard pipes of type PVC-U, PP and PE. The connections are fitted with fixed lip seals. The manhole body is equipped at the top with a riser collar with lip seal for watertight connection of a ribbed PP DN800 riser pipe.

- Maximum installation depth: 6 m
- Permissible groundwater level: 5 m
- Traffic load: SLW60

### Advantages

- The PP inspection chamber complies with NBN EN 13598-2.
- Approved for use in road right-of-ways (ROWS). Technical approval IBDiM AT/2010-02-2706. Technical approval IK AT/07-2011-0242-00. Technical approval IBDiM AT/2011-02-2706.
- The chemical resistance of the PP chamber components to chemical substances complies with the ISO/TR 10358 guidelines.
- The seals comply with the requirements of EN 681-1:2002.
- The chemical resistance of the elastomer seals to chemical substances complies with the ISO/TR 7620 guidelines.



### Characteristics

| Characteristic | Value         | Characteristic   | Value      |
|----------------|---------------|------------------|------------|
| Raw material   | PP            | Pipe wall        | Solid wall |
| Colour         | Reddish brown | Certificate norm | EN 13598-2 |
| Base           | Profile       | Certificate      | BENOR      |

### Variants

| Article code          | Commercial Code | DN (mm) | DN 1 (mm) | H (mm) | Hu (mm) | H1 (mm) | Number of connections | Length (mm) | Weight (kg) |
|-----------------------|-----------------|---------|-----------|--------|---------|---------|-----------------------|-------------|-------------|
| <a href="#">22340</a> | PPBOD800V2018   | 200     | 800       | 555    | 495     | 160     | 2                     | 732         | 26,70       |
| <a href="#">22341</a> | PPBOD800V2518   | 250     | 800       | 705    | 595     | 233     | 2                     | 739         | 28,10       |
| <a href="#">22342</a> | PPBOD800V3118   | 315     | 800       | 705    | 625     | 233     | 2                     | 739         | 28,60       |
| <a href="#">22343</a> | PPBOD800V4018   | 400     | 800       | 705    | 655     | 248     | 2                     | 1218        | 33,20       |

