


Single-layer blue PP-RCT pipe

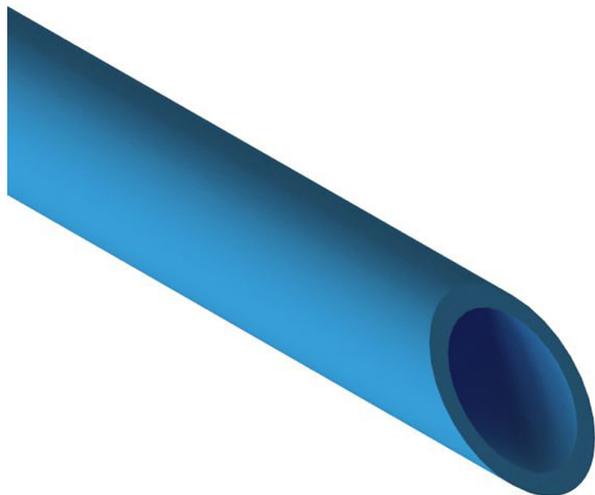

Description

Single-wall PP-RCT pipe for sanitary and hydraulic installations, suitable for both cold and hot water.

- Operating conditions: 25 bar at 20 °C
- Compliant with: UNI EN ISO 15874, DIN 8077, DIN 8078, CSA B 137.11, ASTM F 2389, UNI EN ISO 15494, ISO 4065

Characteristics

Characteristic	Value	Characteristic	Value
Raw material	PP-RCT	Colour	Blue



Single-layer blue PP-RCT pipe

Variants

Article code	Commercial Code	Diameter Ø (mm)	Inner diameter Ø (mm)	Length (m)	Wall thickness (mm)	SDR value
29210	NIRBURCT032	32	24,80	4	3,60	SDR9
29211	NIRBURCT040	40	31	4	4,50	SDR9
29212	NIRBURCT050	50	38,80	4	5,60	SDR9
29213	NIRBURCT063	63	48,80	4	7,10	SDR9
29214	NIRBURCT075	75	58,20	4	8,40	SDR9
29215	NIRBURCT090	90	69,80	4	10,10	SDR9
29216	NIRBURCT110	110	85,40	4	12,30	SDR9
29217	NIRBURCT125	125	97	4	14	SDR9

Variants

Article code	Weight (kg/m)	Litre (l/m)
29210	0,31	0,48
29211	0,49	0,75
29212	0,75	1,18
29213	1,18	1,87
29214	1,67	2,66
29215	2,41	3,82
29216	3,58	5,73
29217	4,63	7,39

