


STRETCH FILM 20μ 500MM BLACK 300M

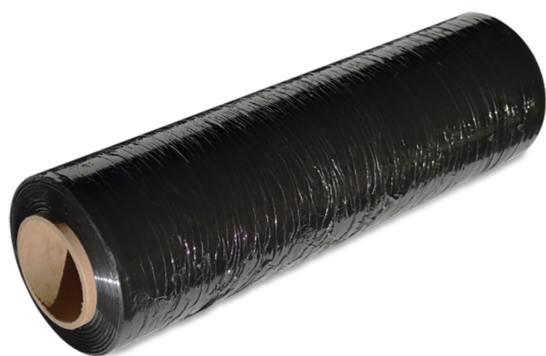

STRETCH FILM 20μ 500MM BLACK 300M

Characteristics

Characteristic	Value	Norm	Tolerance
Article code	30185		
Commercial Code	LC220Z		
Raw material	LLDPE		
Colour	Black		
Thickness micron (μ)	20		
Width	50		
Length (m)	300		
Impact resistance (g)	65	ASTM D1709 A	10%
Tensile strength at break MD (MPa)	32	ASTM D882 B	10%
Tensile strength at break CD (MPa)	17	ASTM D882 B	10%
Tensile strength at yield MD (N/mm ²)	6	ASTM D882 B	10%
Tensile strength at yield MD (MPa)	6	ASTM D882 B	10%
Tensile strength at yield CD (N/mm ²)	5	ASTM D882 B	10%
Tensile strength at yield CD (MPa)	5	ASTM D882 B	10%
Tear resistance MD (mN)	1450	ASTM D1922	10%
Tear resistance CD (mN)	2300	ASTM D1923	10%
Elongation at break MD (%)	410	ASTM D882 B	10%
Elongation at break CD (%)	540	ASTM D882 B	10%
Cling (g)	130	Foylo	10%
Stretch (%)	100%	Foylo	5%
UV resistant	No		
Recyclable	Yes		

