


CAST IRON COVER HOUSING CONNECTION C250 WITH EPDM RING

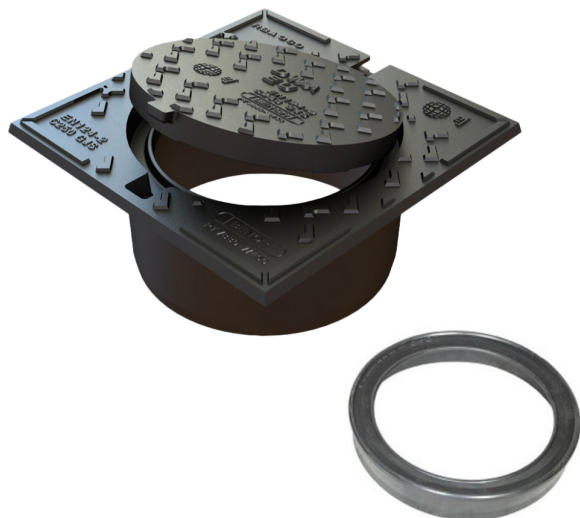

Description

House connection cover with hydraulic slot, equipped with skirt and EPDM connection ring for connection into the PVC pipe.

- Hydraulic slot (equal to or greater than) 6 mm.
- Square frame / circular cover.
- Height-adjustable by means of elastomer rubber.
- Suitable for installation in concrete or asphalt.
- Painted with water-based black site paint in accordance with SB 250, version 4.1.

Advantages

Practical: connection to the PVC pipe by means of an EPDM ring that:

- is easily height-adjustable;
- prevents the ingress of dirt and parasites into the pipeline.

Safety: hinged cover that cannot be removed after embedding.

Comfort: the hydraulic slot prevents odour rise.



CAST IRON COVER HOUSING CONNECTION C250 WITH EPDM RING

Characteristics

Characteristic	Value	Characteristic	Value
Raw material	Cast iron	Certificate	BENOR
Shape	Square	Certificate norm	EN 124-1
Load class	C250		

Variants

Article code	Commercial Code	Width (mm)	Length (mm)	Inner diameter Ø (mm)	Clear opening diameter Ø (mm)	Height (mm)	Weight (kg)
8717	RWA250	320	320	250	182	150	15,40
9657	DWA250	320	320	250	182	150	15,40
30078	DWA315	355	355	315	218	150	17,50
30077	RWA315	355	355	315	218	150	17,50
30460	RWA400	460	460	400	285	150	29,30
30461	DWA400	460	460	400	285	150	29,30

Variants

Article code	Inscription
8717	RWA
9657	DWA
30078	DWA
30077	RWA
30460	RWA
30461	DWA

