


VITRIFIED CLAY CONNECTION PIECE GA SPIGOT/SLEEVE HIGH LOAD

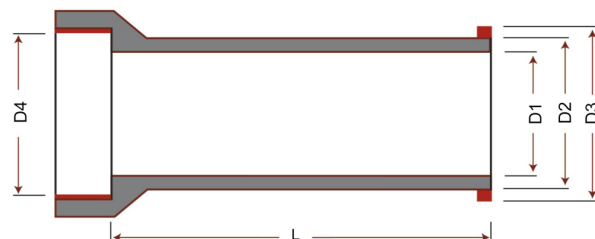

Characteristics

Characteristic	Value	Characteristic	Value
Raw material	GRES	Certificate	BENOR
Colour	Brown	Certificate norm	EN 295-1
Connection	Spigot/socket		

Variants

Article code	Commercial Code	Ring stiffness	Diameter Ø (mm)	D1 (mm)	D2 (mm)	D3 (mm)	D4 (mm)
32467	GRES PEN250MH75	KL240	250	250 +/-6	318 +/-6	344.9 +/-0.5	341.5 +/-0.5
32469	GRES PEN300MH75	KL240	300	300 +/-7	376 +/-7	401.9 +/-0.5	371.5 +/-0.5
18893	GRES PEN500MH	KL160	500	496 +/-9	609 +/-9	640.2 +/-0.5	605 +/-0.5
20504	GRES PEN600MH	KL160	600	597 +/-12	725 +/-12	761.6 +/-0.5	720 +/-0.5



VITRIFIED CLAY CONNECTION PIECE GA SPIGOT/SLEEVE HIGH LOAD**Variants**

Article code	System	Resistance crest pressure (kN/m)
32467	C	60
32469	C	72
18893	C	80
20504	C	96

