


PE INSPECTION CHAMBER FB 315MM 3X110 1X110S 50CM

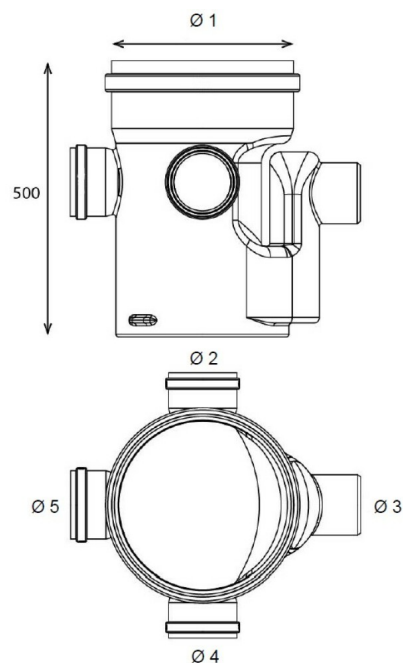

Advantages

- Quick and user-friendly connection
- BENOR certification for guaranteed quality
- Equipped with a rubber seal for easy, watertight height adjustment of the chamber

Application

- For use with buried sewer pipes, for the gravity (non-pressurised) discharge of rainwater and domestic wastewater.
- Suitable for use in combination with PVC, PP and HDPE pipes.
- Connections are made using PVC fittings with an integrated sealing ring.
- With regard to thermal resistance, the drainage system is suitable for the discharge of domestic wastewater from indoor drainage systems, where temperatures may exceed 65 °C for a limited period of time.

Characteristics

Characteristic	Value	Characteristic	Value
Article code	<u>32480</u>	Diameter Ø 2 (mm)	110
Commercial Code	PUT23CPE	Diameter Ø 3 (mm)	110
Raw material	PE	Diameter Ø 4 (mm)	110
Colour	Black	Diameter Ø 5 (mm)	110
Certificate	BENOR	Height (mm)	500
Diameter Ø (mm)	315	Base	Flat

