


## PE DOUB. CHAM. FP 250MM A/3X110 B/2X110 1X160 50CM

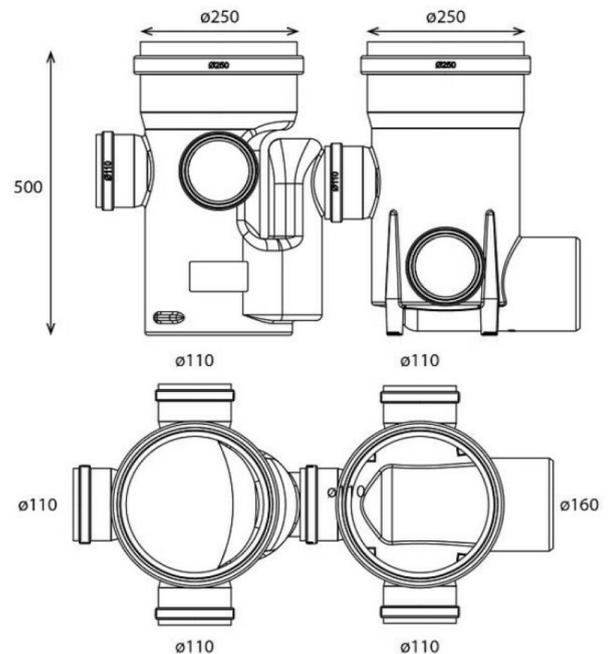

### Advantages

- Quick and user-friendly connection
- BENOR certification for guaranteed quality
- Equipped with a rubber seal for easy, watertight height adjustment of the chamber

### Application

- For use with buried sewer pipes, for the gravity (non-pressurised) discharge of rainwater and domestic wastewater.
- Suitable for use in combination with PVC, PP and HDPE pipes.
- Connections are made using PVC fittings with an integrated sealing ring.
- With regard to thermal resistance, the drainage system is suitable for the discharge of domestic wastewater from indoor drainage systems, where temperatures may exceed 65 °C for a limited period of time.

### Characteristics

Characteristic	Value	Characteristic	Value
Article code	33001	Diameter $\varnothing$ (mm)	250
Commercial Code	PUT32APE	Diameter $\varnothing$ 2 (mm)	110
Raw material	PE	Diameter $\varnothing$ 3 (mm)	160
Colour	Black	Height (mm)	500
Certificate	BENOR	Base	Profile / flat

