


## SS BELL GRATE 20/20 VERTICAL Ø110 ONE-PIECE

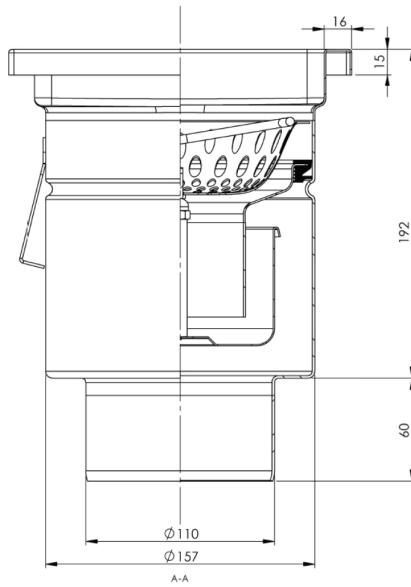

### Description

The drain sump and grating are manufactured from stainless steel grade AISI 304 / EN 1.4301. Upon request, versions in AISI 316L / EN 1.4404 are also available. The type of drain sump execution depends on the load class, the flow rate (amount of water to be drained) and the design parameters. The floor drain sumps are produced from stainless steel sheet with a thickness adapted to the relevant type. All components are argon-welded and subsequently pickled by immersion, ensuring a high-quality finish of the weld seams. Stainless steel drainage in accordance with EHEDG DOC 44, EN 1253, EN 1672 and EN 14159.

### Drain housing

The round shape of the drain housing reduces sedimentation and facilitates the removal of dirt. The weld seams are carefully ground, preventing sharp edges. This ensures safety during installation and maintenance.

### Gratings

Available in various shapes, sizes and configurations. The gratings are selected based on the load class and the location of the drain sump. We offer the following grating options: anti-slip mesh grating, (anti-slip) ladder grating, plate grating and perforated plate grating.



## SS BELL GRATE 20/20 VERTICAL Ø110 ONE-PIECE

### Advantages

- Choice of various gratings tailored to the application and load class
- Easy installation
- Thanks to the well-designed odour trap, each drain also functions as a bell trap
- Simple construction
- User-friendly and easy to maintain

### Characteristics

Characteristic	Value	Characteristic	Value
Article code	<a href="#">33259</a>	Length (mm)	200
Commercial Code	SS.W200/110V1	Width (mm)	200
Raw material	Stainless steel AISI 304	Connection diameter (mm)	110

