


PVC REDUCER Y JUNCTION 45° TRIPLE SOCKET BENOR GREY

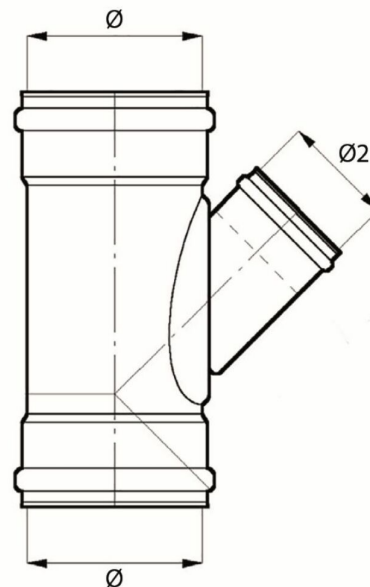

Description

PVC T-Joint, with sockets on the through connection and branch, fitted with rubber sealing rings, locking rings and protective rings.

Advantages

- Optimal sealing
- The rubber coupling is secured in place by a locking ring
- The integrated insertion stop ensures the pipe is always pushed in to the correct depth
- BENOR certification for guaranteed quality

Characteristics

Characteristic	Value	Characteristic	Value
Raw material	PVC	Connection	Triple socket
Colour	Grey	Certificate	BENOR
Degrees (°)	45	Certificate norm	EN 1401-1
Pipe wall	Solid wall		



PVC REDUCER Y JUNCTION 45° TRIPLE SOCKET BENOR GREY

table.variants

Article code	Commercial Code	Diameter Ø (mm)	Diameter Ø 2 (mm)	Ring stiffness
3356	RT12114	125	110	SN4
3360	RT16114	160	110	SN4
3364	RT16124	160	125	SN4
27503	RT20114	200	110	SN4
11567	RT20124SN8	200	125	SN8
11568	RT20164SN8	200	160	SN8
3377	RT25124	250	125	SN4
3379	RT25164	250	160	SN4
3381	RT25204	250	200	SN4
3383	RT31124	315	125	SN4
3385	RT31164	315	160	SN4
18928	RT31164SN8	315	160	SN8
3388	RT31204	315	200	SN4
3391	RT31254	315	250	SN4
3395	RT40204	400	200	SN4
3953	RT40254	400	250	SN4
3397	RT40314	400	315	SN4

