


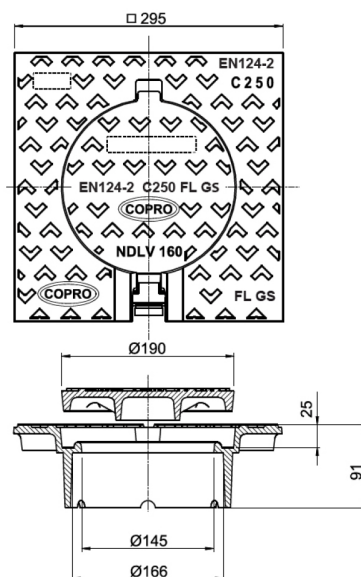

Description

A hinged hydraulic connection cover, load class C250.

Advantages

- Frame with hydraulic odour barrier
- Cover opening angle > 110° to allow easy access and optimise user safety
- Once installed, the cover can no longer be dismantled (anti-theft)
- Anti-slip pattern for optimised noise reduction

Application

Intended for pedestrian zones, car parks and similar areas with vehicle traffic.

Characteristics

Characteristic	Value	Characteristic	Value
Article code	49847	Inscription	DWA
Commercial Code	DWA160F	Load class	C250
Raw material	Cast iron	Width (mm)	295
Shape	Square	Length (mm)	295
Lid properties	Hydraulic seal, Hinged cover	Clear opening diameter Ø (mm)	160
Certificate	Copro	Height (mm)	91
Certificate norm	EN 124-2	Weight (kg)	9

