


FILCLAIR N PVC HOSE

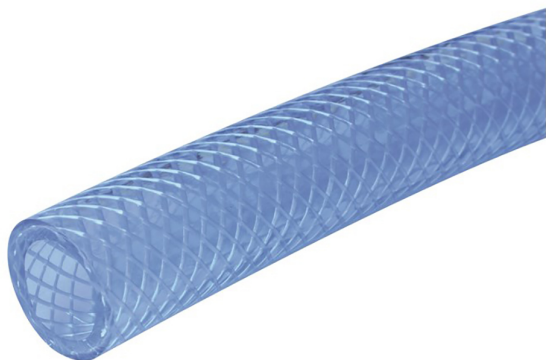

Description

Flexible and versatile PVC hose reinforced with durable textile yarn

- Temperature range: -15 to 60 °C
- Working pressure (WP) and test pressure (TP) measured at 23 °C

Application

- Transport of products or liquids
- Supply of compressed air to machines and tools
- Transport of industrial gases
- Transport of light chemical products
- Water supply
- Not suitable for hydrocarbons and derivatives
- Maintains shape under vacuum up to Ø 25 mm

Characteristics

Characteristic	Value	Characteristic	Value
Raw material	PVC	Colour	Transparent



FILCLAIR N PVC HOSE

Variants

Article code	Commercial Code	Inner diameter Ø (mm)	Outer diameter Ø (mm)	Working pressure (bar)	Burst pressure (bar)	Weight (g/m)
5799	F0508	5	8	10	30	39
5809	F1218	12	18	10	30	170
5813	F1319	13	19	15	50	192
5817	F1622	16	22	10	30	222
5819	F1926	19	26	10	30	302
5821	F2533	25	33	10	30	432
5827	F5060	50	60	8	24	1072

