


SUPERVAP VARIO MOISTURE-REGULATING VB 1.5X50M



Characteristics

Characteristic	Value	Tolerance
Raw material	PP	
Colour	Yellow	
Length (m)	50	
Width (m)	1,50	
Water vapour permeability (g/m ² /d)	5-6	
EU fireclass	E	
Tempature resistance	-40 +80° C	
SD value (m)	ca. 8	
Active SD value (m)	ca. 2-16	
UV resistance (months)	3	
UV exposure time (weeks)	4	
Weight (g/m ²)	90	+ - 5%
Water tightness	W1	
Tensile strength MD (N/50mm)	>180	
Tensile strength CD (N/50mm)	>180	
Tear resistance MD (N)	>130	
Tear resistance CD (N)	>130	

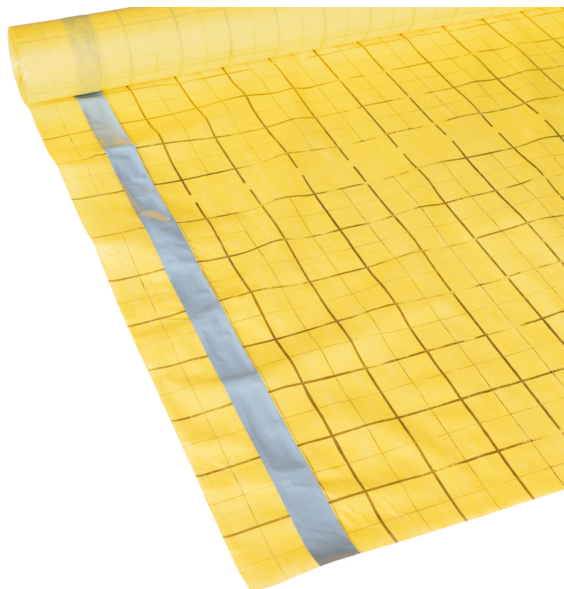