


SUPERVAP VAPOUR BARRIER SARKING 1.5X50M 170GR/M²**Characteristics**

Characteristic	Value	Tolerance
Raw material	PP	
Colour	White	
Length (m)	50	
Width (m)	1,50	
Water vapor permeability (m ² *s*PA)/kg	ca. 559 *109=g/m ² /24u	
EU fireclass	E	
Tempature resistance	-40 +80° C	
SD value (m)	ca. 100	
UV resistance (months)	2	
Weight (g/m ²)	170	+ - 5%
Water tightness	W1	
Tensile strength MD (N/50mm)	>170	
Tensile strength CD (N/50mm)	>150	
Elongation MD (%)	40	+ - 20%
Elongation CD (%)	40	+ - 20%
Tear resistance MD (N)	>150	
Tear resistance CD (N)	>130	

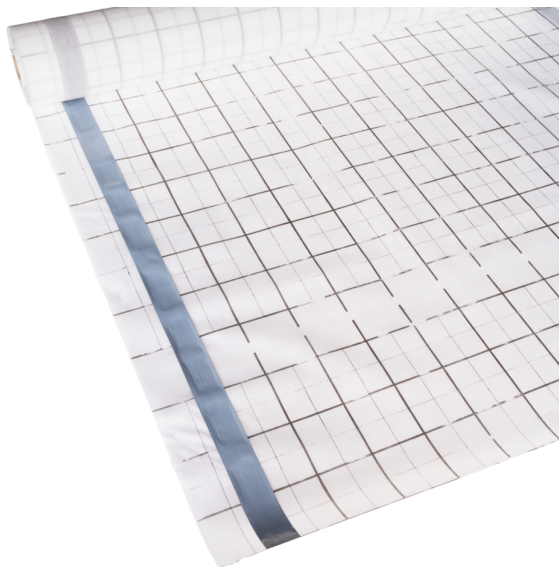