


PREMIUM BASEMENT DIMPLE MEMBRANE

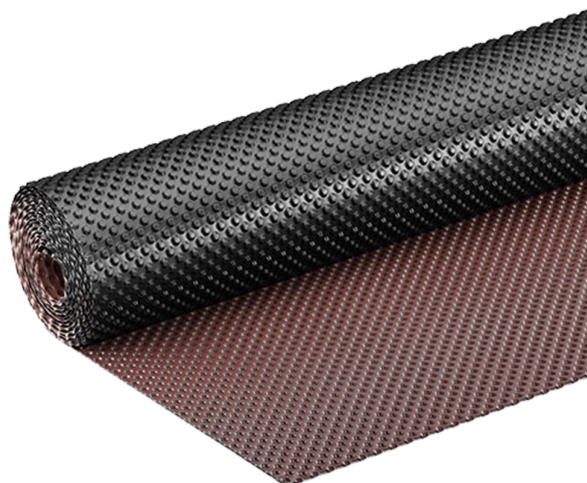

Description

Dimpled membrane for protecting the insulation and coating of foundation walls during backfilling of the excavation.

- Water-resistant – chemical-resistant – root-resistant – safe for drinking water – rot-proof

Characteristics

Characteristic	Value	Characteristic	Value
Raw material	HDPE	Stud height (mm)	8
Colour	Black	Number of studs	> 1930 per m ²
Weight (g/m ²)	420	Airvolume between studs	+/- 5.02 l/m ²
Compressive strength (kN/m ²)	400	Temperature resistance	- 30 °C / + 80 °C

Variants

Article code	Commercial Code	Width (m)	Length (m)
7313	NOP100	1	20
7314	NOP150	1,50	20
7315	NOP200	2	20
11975	NOP250	2,50	20

