

103060LP

Gullies - flat grating D400



PTV 802

hinged



DESCRIPTION

Gullies for road infrastructure, industrial zones D400

ADVANTAGE PRODUCT

- Hinged grating (opening direction can be changed)
- Flat grating, with round bars, 45° bars or pedestrian.
- Grating pedestrian bars: opening between bars <20mm for additional security for wheelchairs and bicycles.
- Lateral outlet Ø PVC 160
- 2 handling hooks
- Grating supports on 6 points with EPDM seal.






MATERIAL

Ductile iron GJS 500-7 depending on EN1563

PLACE OF INSTALLATION

Group 3, →see EN124-1

For gully tops installed in the area of kerbside channels of roads which when measured from the kerb edge, extend a maximum of 0,5m into carriageway.

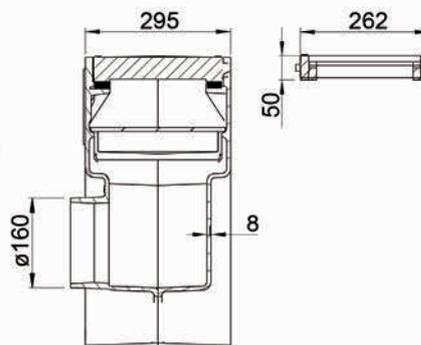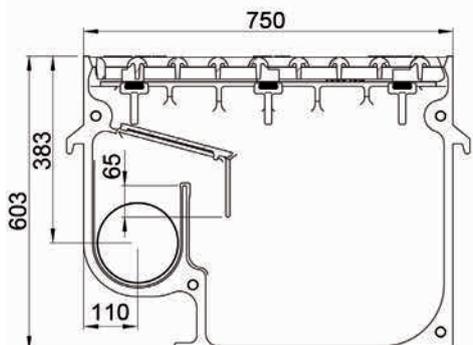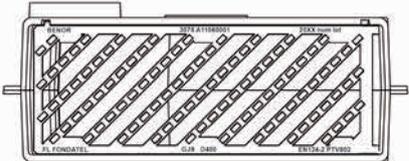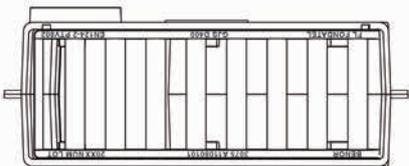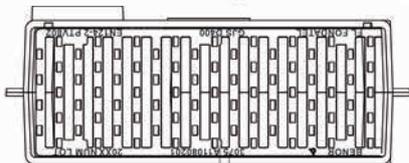

REFERENCE	ARTICLE N°	GTIN/EAN CODE	RAPID COPRO CODE	KG	CAPACITY	CAPACITY HOLDING TANK	PACK.
AVA 307560 flat - pedestrian bars - lateral outlet - pvc	103060LP1.160	05404041402208	0452/0327	130,0	6,96 dm ²	46L	8
AVA 307560 flat - round bars - lateral outlet - pvc	103060LP0.160	05404041402185	0452/0320	130,0	8,10 dm ²	46L	8
AVA 307560 flat - 45° bars - lateral outlet - pvc	103060LP7.160	05404041402239	0452/0308	130,0	9,50 dm ²	46L	8

Sizes in mm - Weights, sizes and sketch are indicative - Uncontrolled distribution.

103060LP

Gullies - flat grating D400

PTV 802



hinged



<https://fondatel.com/index.php/environmental-policy-2/?lang=en>
<https://qr.co2logic.com/52518ea7746fcbcc911c6b2a8873e80>



The validity of the data sheet can be checked using the device article n° COPRO on the COPRO website. <https://extranet.copro.eu/en/Sheets>

ENVIRONMENT

0 kg CO₂/unit through offsetting (*)

(*) FONDATEL is committed to reducing emissions within its "core boundary" (as defined by the SBTi Steel sector guidelines) by 25% by 2030 compared to 2022.

To compensate for emissions that cannot yet be avoided, FONDATEL has committed to supporting certified climate projects that help reduce global carbon emissions and offer co-benefits aligned with the United Nations Sustainable Development Goals.

Compensation is 254,80 kg CO₂/product

CERTIFICATION THIRD PARTY

- Conform PTV 802, type G1 class D400
- Certified EN124-2 BENOR by Copro

VARIANTS

Available with concave grating: 103060LP

VARIANT



Sizes in mm - Weights, sizes and sketch are indicative - Uncontrolled distribution.