

# 103040LP

## Gullies - flat grating D400



PTV 802

hinged



### DESCRIPTION

Gullies for road infrastructure, industrial zones D400

### ADVANTAGE PRODUCT

- Hinged grating (opening direction can be changed)
- Flat grating, with round bars, 45° bars or pedestrian.
- Grating pedestrian bars: opening between bars <20mm for additional security for wheelchairs and bicycles.
- Lateral outlet.
- 2 handling hooks
- Grating supports on 6 points with EPDM seal.


### MATERIAL

Ductile iron GJS 500-7 depending on EN1563

### PLACE OF INSTALLATION

Group 3, →see EN124-1

For gully tops installed in the area of kerbside channels of roads which when measured from the kerb edge, extend a maximum of 0,5m into carriageway.

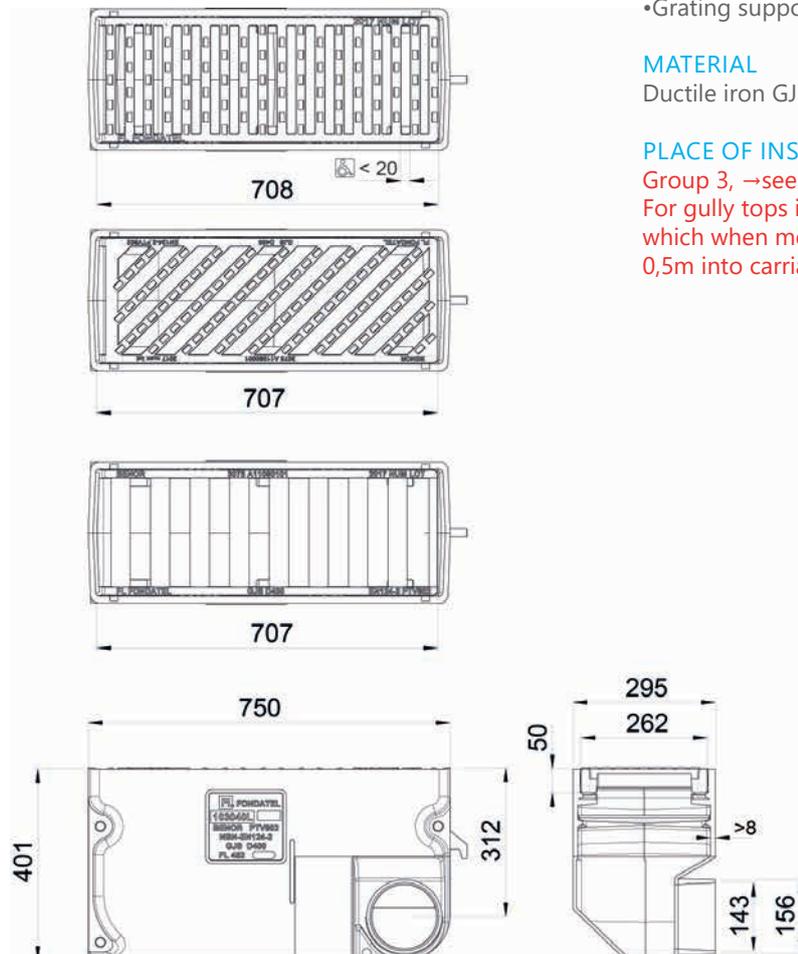

REFERENCE	ARTICLE N°	GTIN/EAN CODE	RAPID COPRO CODE	KG	CAPACITY	CAPACITY HOLDING TANK	PACK.
AVA 307540 flat - pedestrian bars - lateral outlet - pvc	103040LP1.160	05404041436401	0452/0325	122	6,96 dm <sup>2</sup>	24,7L	12
AVA 307540 flat - round bars - lateral outlet - pvc	103040LP0.160	05404041436395	0452/0321	122	8,10 dm <sup>2</sup>	24,7L	12
AVA 307540 flat - 45° bars - lateral outlet - pvc	103040LP7.160	05404041436425	0452/0306	122	9,50 dm <sup>2</sup>	24,7L	12

Sizes in mm - Weights, sizes and sketch are indicative - Uncontrolled distribution.

# 103040LP

## Gullies - flat grating D400

PTV 802



hinged



<https://fondatel.com/index.php/environmental-policy-2/?lang=en>  
<https://qr.co2logic.com/52518ea7746fcbcc911c6b2a8873e80>



The validity of the data sheet can be checked using the device article n° COPRO on the COPRO website. <https://extranet.copro.eu/en/Sheets>

### ENVIRONMENT

#### 0 kg CO<sub>2</sub>/unit through offsetting (\*)

(\*) FONDATEL is committed to reducing emissions within its "core boundary" (as defined by the SBTi Steel sector guidelines) by 25% by 2030 compared to 2022.

To compensate for emissions that cannot yet be avoided, FONDATEL has committed to supporting certified climate projects that help reduce global carbon emissions and offer co-benefits aligned with the United Nations Sustainable Development Goals.

Compensation is

103040LP1.160	239,12 kg CO <sub>2</sub> /product
103040LP0.160	239,12 kg CO <sub>2</sub> /product
103040LP7.160	239,12 kg CO <sub>2</sub> /product

### CERTIFICATION THIRD PARTY

- Conform PTV 802, type F1 class D400
- Certified EN124-2 BENOR by Copro

### VARIANT

- Available with concave grating: 103040LI

### VARIANT



Sizes in mm - Weights, sizes and sketch are indicative - Uncontrolled distribution.