


HDPE CABLE PROTECTION PIPE SDR11

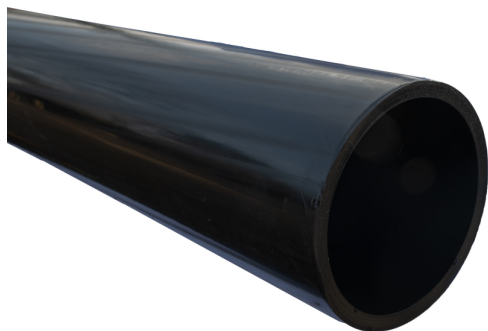

Description

HDPE cable protection pipes are used to protect cables against various external influences. These pipes are commonly applied in the infrastructure of telecommunications networks, power distribution networks and data networks.

The use of these pipes helps extend the service life of cables, reduces maintenance costs and improves the overall reliability of the network. Our HDPE cable protection ducts are available in various diameters and wall thicknesses, depending on the specific application and the size of the cables they are designed to accommodate.

Advantages

- Strong and flexible material: the pipes can be easily bent without breaking
- Resistant to corrosion, frost and UV radiation; suitable for both underground and above-ground installation
- Smooth inner surface reduces friction when pulling cables
- Durable and environmentally friendly: HDPE has a long service life and is fully recyclable

Application

These cable protection pipes are suitable for open-trench installation, ploughing and milling, as well as for installation by means of horizontal directional drilling (HDD).



HDPE CABLE PROTECTION PIPE SDR11

Characteristics

Characteristic	Value	Characteristic	Value
Raw material	HDPE	SDR value	SDR11
Colour	Black		

Variants

Article code	Commercial Code	Diameter Ø (mm)	Wall thickness (mm)	Toegepaste trekkracht (kN)	Length (m)	Certificate norm
13184	PEBOOR0901	90	8,20	16.8	12	DIN 16876
21523	PEBOOR090PE100R100	90	8,20	16.8	100	DIN 16876
28711	PEBOOR090PE100R150	90	8,20	16.8	150	DIN 16876
49778	PEBOOR090500	90	8,20	16.8	500	DIN 16876
13408	PEBOOR11016M	110	10	25.1	6	DIN 16876
12860	PEBOOR1101	110	10	25.1	12	DIN 16876
14866	PEBOOR110120	110	10	25.1	20	DIN 16876
22511	PEBOOR1101100	110	10	25.1	100	DIN 16876
28712	PEBOOR1101150	110	10	25.1	150	DIN 16876
13409	PEBOOR12516M	125	11,40	32.5	6	DIN 16876
12861	PEBOOR1251	125	11,40	32.5	12	DIN 16876
13098	PEBOOR16016M	160	14,60	53.3	6	DIN 16876
33642	PEBOOR160110	160	14,60	53.3	10	DIN 16876
9677	PEBOOR1601	160	14,60	53.3	12	DIN 16876
13503	PEBOOR16020	160	14,60	53.3	20	DIN 16876
15723	PEBOOR2001L6M	200	18,20	83.1	6	DIN 16876
30627	PEBOOR2001	200	18,20	83.1	12	DIN 16876
13336	PEBOOR20012	200	18,20	83.1	20	DIN 16876
21622	PEBOOR22511	225	20,50	105.4	12	DIN 16876
26660	PEBOOR22520	225	20,50	105.4	20	DIN 16876
12862	PEBOOR2501	250	22,70	129.7	12	DIN 8074

