


IT PLUS COLUMN BOX 900X600X600MM SLW60

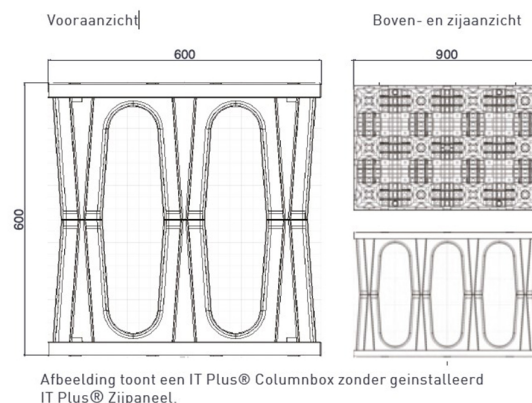

Description

The IT Plus Columnbox is specifically designed for use in large-scale, engineered applications. The system forms part of a sustainable water management solution and is intended for the storage, conveyance and infiltration of rainwater, whether originating from roofs, roads, car parks or any other paved surface. The height is assembled from two units to form one box with a total height of 600 mm.

Advantages

- Extremely high stability (heavy traffic, SLW 60*)
- Easy to install (one-man handling)
- Significantly reduced transport costs
- NEN and TÜV Nord certified
- The quality of the polypropylene is checked on a random basis by the relevant certification body
- Product quality control during the manufacturing process
- German engineering and production
- Service life of the polypropylene units: at least 50 years

*SLW 60 = axle load per m²



IT PLUS COLUMN BOX 900X600X600MM SLW60**Characteristics**

Characteristic	Value	Characteristic	Value
Article code	<u>32991</u>	Net volume (L)	304
Commercial Code	COLUMNBOX90	Storage capacity gross (l)	320
Raw material	Polypropylene	Storage_capacity_net_l	304
Width (mm)	600	Combined weight (kg)	13,85
Length (mm)	900	Weight per m ³ (kg)	48
Height (mm)	600	Empty percentage (%)	95
Gross volume (L)	320	Maximum depth	3 niveaux, plus sur étude

