


FILCLAIR AL PVC HOSE

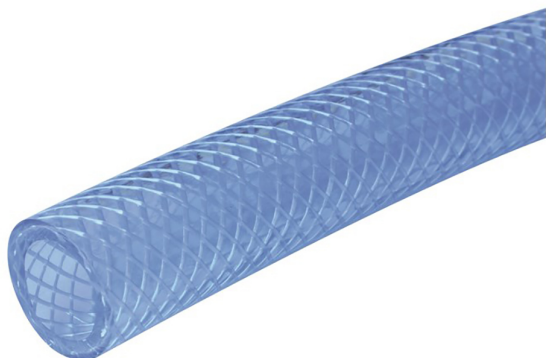

Description

Flexible and versatile food-grade PVC hose reinforced with durable textile yarn

- Temperature range: -15 to 60 °C
- Transport of foodstuffs or food liquids, excluding solutions with an alcohol content above 15% vol (approved by test laboratory IANESCO, report PV No. 10482 dated 28/12/1990)
- Working pressure (WP) and test pressure (TP) measured at 23 °C

Application

- Supply of compressed air to machines and tools
- Transport of industrial gases
- Transport of light chemical products
- Not suitable for hydrocarbons and derivatives
- Maintains shape under vacuum up to Ø 25 mm

Characteristics

Characteristic	Value	Characteristic	Value
Raw material	PVC	Colour	Transparent



FILCLAIR AL PVC HOSE

Variants

Article code	Commercial Code	Inner diameter Ø (mm)	Outer diameter Ø (mm)	Working pressure (bar)	Burst pressure (bar)	Weight (g/m)
6099	F0410	4	10	15	50	86
5801	F0612	6	12	15	50	110
5803	F0814	8	14	15	50	130
5805	F0915	9	15	15	50	141
5807	F1016	10	16	15	50	155
5815	F1523	15	23	15	50	308
5823	F3242	32	42	15	50	319
5825	F3848	38	48	10	32	865

