



MUNICIPAL

STRETO D400 C&F NSAI
ACCESS COVERS

Class D400
Composite
Cover(s)
EN124-5:2015
Ductile frame
EN124-2 : 2015



DESIGN FEATURES :

Materials :

Frame : EN GJS 500-7 Iron ISO 1083 / EN1563 Cover :
Advanced fibre-reinforced Composite

Design load :

400 kN to EN 124
Installation Area : Group 4 restricted to parking areas and
hard shoulder (as detailed on article 5 fig 9b) for all types
of roads vehicles (and lower groups).

Coating :

Frame: Non toxic waterbased black paint.

Certification :

NSAI

SPECIAL FEATURES :

Mass :

Cover : 23.0 kg.
Product total : 49.000 kg.

Surface finish :

Cover: Anti-slip surface according to EN124. Surface
with 4L design.

**Seatings ensure non-rock stability and
silence :**

Continuous "polypro EPDM" cushioning insert, fixed to the
frame.

Frame bearing pressure :

$p \leq 7.5 \text{ N/mm}^2$.

Securing of cover/grating within frame :

Stainless steel quarter turn camlock with OTC type head
as standard. Other available on request

Frame type :

Depth : 100 mm.

Cover type :

Cover fitted with 1/4-turn locking system (coded key not
supplied).

C : External diameter : 650 mm.

Depth of insertion : e= 25 mm.

Locking system :

Corrosion resistant fittings.
Key or hook is supplied separately, to order

OPTION(S) :

Badging available please enquire
Cover available in any RAL color




CIVIL ENGINEERING :

Frame provided with $\varnothing 20 \text{ mm}$ holes to dowel if
necessary.

HANDLING :

The handling can be achieved by only one operator
Unlocking and opening by means of a coded key.

BRAND(S) :

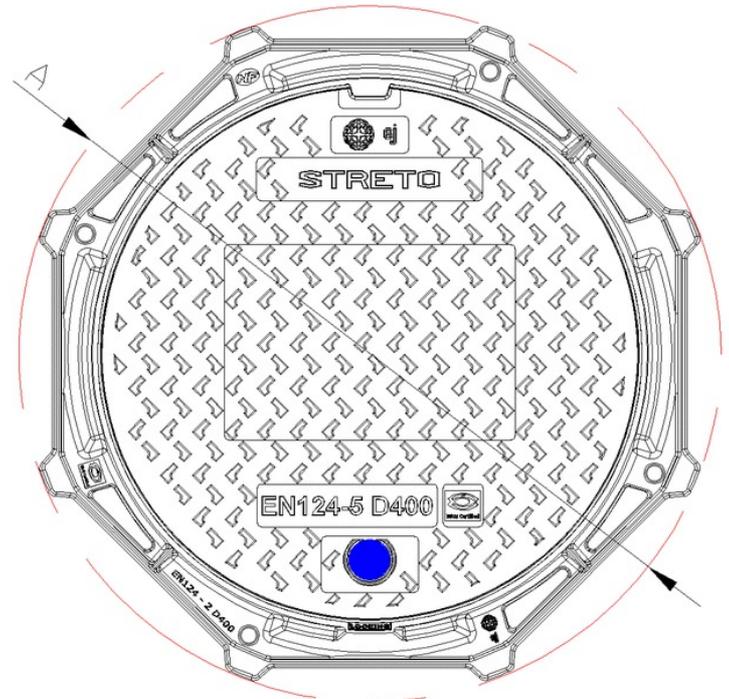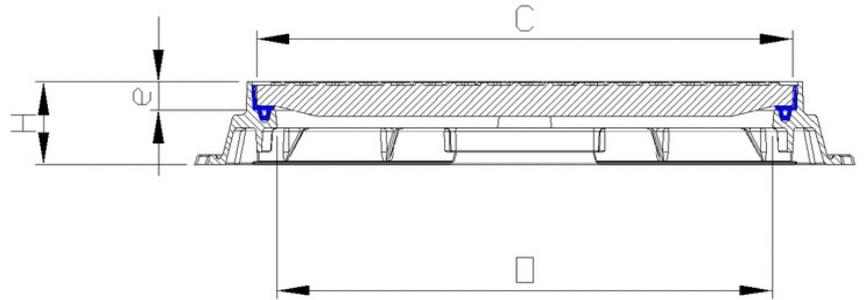

O	A	C	H	e
$\varnothing 600$	$\varnothing 850$	$\varnothing 650$	100	25

Weights (kg), Dimensions (mm), and drawings provided for your guidance.
We reserve the right to modify specifications without prior notice.
Uncontrolled distribution.

CONFIDENTIAL Property of EJ
EMEA Not to be used without permission.

EJ IN IRELAND

Roscrea Road Birr Co. Offaly R42 X009 Ireland

ISO 9001 - ISO 14001 - ISO 45001

www.ejco.com/ie/en

Data sheet : FT_721063

Date updated : 01.05.2024

Printed : 30.04.2024